

### INSTALLATION INSTRUCTION

#### LED BATTEN FITTING WITH 3IN1 CCT - SWITCH CONTROL



#### TECHNICAL DATA:

MODEL	WATTS	LUMENS	BEAM ANGLE	CRI	PF	3IN1 CCT SWITCH CONTROL	ON/OFF CYCLE	INPUT POWER
VT-8-45	40W	4800LM	120°	>80	>0.9	WW - WARM WHITE 3000K DL - DAY LIGHT 4000K CW - COOL WHITE 6400K	>15,000	AC: 220-240V, 50Hz
VT-8-55	50W	6000LM	120°	>80	>0.9		>15,000	AC: 220-240V, 50Hz



IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU  
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOV 9B

### INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any other query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

### WARNING!

1. Please make sure to turn off the power before starting the installation.
2. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
3. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
4. Proper grounding should be ensured throughout the installation.
5. Installation must be performed by a qualified electrician
6. Please do not install on a surface that is prone to vibrations.
7. For Indoor use only [IP20].



This marking indicates that this product should not be disposed of with other household wastes.

Caution, risk of electric shock.



### MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

### PACKAGING CONTENTS

1  <b>BATTEN FITTING</b>	2  <b>WALL PLUGS</b>	3  <b>SCREWS</b>	4  <b>INSTRUCTION MANUAL</b>
--------------------------------	----------------------------	------------------------	------------------------------------

### PRODUCT FEATURES

1. No Ballast or starter required. Direct AC power
2. 0-100% in <1 second.
3. No flickering. No UV Radiation.
4. Long lifespan, low maintenance and energy saving.
5. Quick connector for easy wiring.
6. LED Batten Fitting has safety straps inside for hands free maintenance.

**Applications:** Widely used for domestic & commercial lighting, office, supermarkets, shops, hotels & similar environment

### FIXING POINTS

Install the fitting on the desired position either using the fixing points or BESA plates for conduit mounting. (Please refer to TABLE 1 & FIG A)

Watts	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)
24W / 40W	1166	1092	652	602
28W / 50W	1466	1392	652	602
60W	1766	1692	652	602

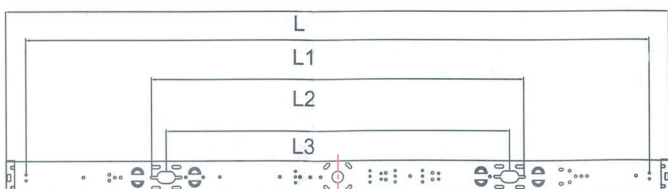


FIG A

### INSTALLATION INSTRUCTIONS

1. Switch OFF the power before starting the installation.

2. Drill holes on the wall/surface using the fixing points or BESA plates for conduit mounting (Refer Table 1 & FIG A).

3. Press the sides of the base and gently remove the front cover/diffuser. LED Batten Fitting has safety straps inside for hands free maintenance.

4. Install plastic plugs into the drilled holes. Feed the cable from the backside of the fitting as shown in the diagram. Using the screws install the backside of the fitting on the wall/surface.

5. Connect supply leads with terminal brown (L) to brown, blue (N) to blue & greenish-yellow (⊕) to greenish-yellow.

6. Set the desired color temperature. It will stay in the color temperature chosen until changed

7. Gently push fit the front cover/diffuser to the backside fitting until you hear a click sound. Ensure the fitting is properly fixed.

8. Switch ON the power to test the light.